


PowerFLEX™
Cable Assemblies

PowerPARTS™
Wiring Devices



LEX


WE DELIVER THE POWER™

LSC19 Evergrip

Lighting Cable Assemblies
and Connectors

PowerFLEX™ and PowerPARTS™

- Introducing a new generation of Lex Products 19 pin, 6 circuit cable assemblies and connectors
- New design eliminates spinning interiors
- Connectors rated for 23 Amps, 600 VAC

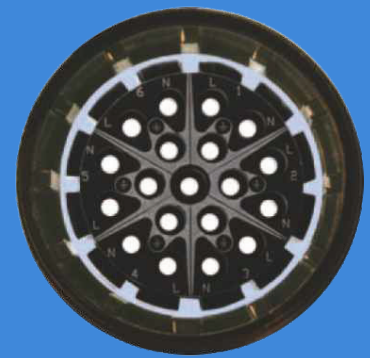

**Anti-rotation design with
12 interlocking keys**





LEX


WE DELIVER THE POWER™

LSC19 EverGrip 19 Pin Multi-Cable Extensions

No More Spinning Interiors!

Lex Products' proprietary new anti-rotation design features 12 interlocking keys to help prevent the spinning of an interior within a connector's male or female housing. The new LSC19 connectors help to eliminate this long standing industry problem, while delivering enhanced safety and durability. The new connector design helps lower maintenance requirements and total cost of ownership.

- Helps eliminate broken conductors and loose or damaged ground rings
- Prevents misalignment of male and female circuit conductors



New anti-rotation connector features 12 interlocking keys to prevent spinning



"Tempered Spring" Female Contacts

maintain constant pressure over the life of the device and help ensure low resistance connections. Silver plated brass contacts allow for high conductivity.



Higher Rating!

- Lex Products' new LSC19 Connectors are rated 23 Amps, 600 VAC
- Each circuit can carry up to a maximum of 23 Amps continuous load
- Interiors are clearly and permanently marked on front and back for ease of wiring and circuit identification


Grounding Rings - available on request

A recessed area in the interior accepts the grounding rings, allowing the ground conductors in multi-cable to be bonded. Extended grounding contacts provide "first make last break connection".

Personalised Moulding Available

Lex offers custom logo marking for EverGrip moulded cable assemblies. These markings are created on an insert in the mould itself and are permanent.

£20 one off charge
Free for 50+ pieces



Dimensions of insert

- L1** - 37.6mm
- L2** - 19.3mm



Features & Benefits

- Proprietary 6-circuit lighting connectors feature 12 interlocking keys to help prevent spinning of the interior within the male and female housing
- Prevents misalignment of male and female circuit conductors and unmateable or mismatched connection
- Helps prevent broken conductors and loose or damaged ground rings
- Multi-cables carry 6-circuits of lighting power inside a single jacket, avoiding 6 individual runs of cable
- "Tempered Spring" female contacts maintain constant pin pressure to help ensure low resistance connections
- Machined aluminium housing with hard wearing black finish provides enhanced durability
- Silver plated brass contacts provide high conductivity
- Available for 1.5mm² and 2.5mm² cable
- Specially formulated PVC jacket provides exceptional flexibility and durability
- All black construction blends into scenery and is ideal for stage or studio lighting applications
- Option available with bonded earth contacts

Part Number	Description	Cable	Rating
EGME-18G-1.5-XX	Evergrip Moulded Socapex Extension PVC 18G x 1.5mm	18G x 1.5mm ²	16 Amp, 240 VAC Maximum (6-Circuit)
EGME-18G-2.5-XX	Evergrip Moulded Socapex Extension PVC 18G x 2.5mm	18G x 2.5mm ²	16 Amp, 240 VAC Maximum (6-Circuit)

XX in part number to specify cable length.

Contact sales for more information.

